

battery type: Lithium Button Cell
battery size: CR2354
chemical system: Lithium Manganese Dioxide

nominal voltage: 3.0 V
open circuit voltage: 3.0...3.4 V (new battery)
 2.9...3.4 V (after 1 year storage at 20°C)

Conditions


capacity
 rated: 550 mAh (discharge under 7.5kΩ load; 24hours/day; End Voltage (EV): 2.0V)
 minimum: 520 mAh (discharge under 7.5kΩ load; 24hours/day; End Voltage (EV): 2.0V)

Standard discharge time
 minimum: 230 h (at 1.5kΩ load; EV: 2.0V) (for QC measurement)


Discharge currents
 standard: 0.2 mA
 max. recommended current under continuous discharge: 3 mA
 max. recommended current under pulse discharge: 15 mA

Discharge diagrams:

Discharge Characteristics on Load

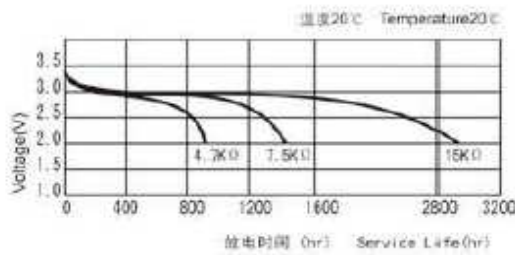


Discharge Characteristics on Temperature

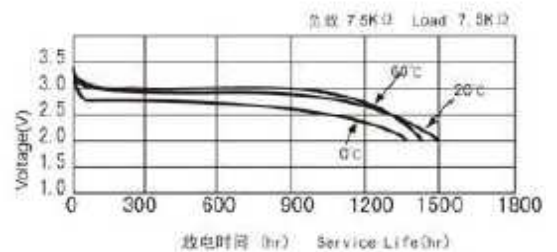

shelf life: 10 years under proper storage conditions (ta: ≤ 22°C; RH: 60 ± 15%)

operating temperature range: - 20...60 °C


mechanical specifications:

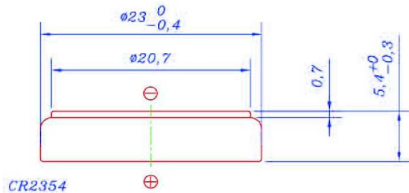

blister card dimensions: 56 x 71.5mm

weight: 7.9g (incl. battery)

nominal weight: 6.1 g

	ANSMANN Specifications for model:	CR2354 Lithium Button Cell blister package
	data sheet no. / part no.	1516-0012
	supplier no.	702572
	author / date	TG / 22.04.2013